

PRODUCT DATASHEET

Model: L2T707 L3T707 L4T707
Category: LED Tracklight
Description: 23w LED Tracklight



General Information


Material: Aluminium
Fitting Colors: White/ Black/ Painted Silver
Rotation Angle (degree): 350
Tilting Angle (degree): 90
Track System: Available in single wire, 3 wire, 3 phase
IP Rating: 20
Working Temperature (°C): -5 - +35
Storage Temperature (°C): -20 - +50
Approval: CB



Product Dimensions and Cut-out Information

Fitting Length (mm): 165
Diameter (mm): 85
Height (mm): Not Applicable
Cut-out Dimension (mm): Not Applicable

Dimension:

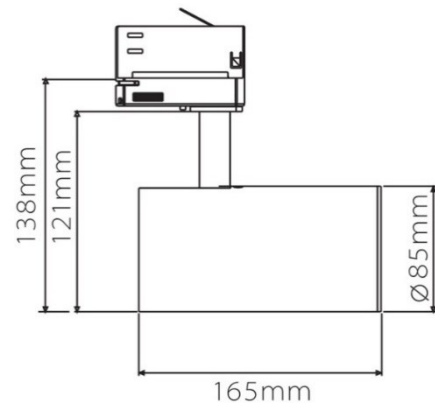

Packing Information

Packaging Type: Individual box
Quantity per carton: 12
CBM per carton: 0.0329
Gross weight per carton (kgs): 13

Lifespan

Lifetime (hours): 50000
Luminous Flux after 50000hours (lm): LM80 Comply

PRODUCT DATASHEET

Model: L2T707 L3T707 L4T707
Category: LED Tracklight
Description: 23w LED Tracklight



Light Technical Information

Color Temperature	CRI (Ra)	Gamut Index (GAI)	System Lumen	Lumen per Watt
2700	90	90	2420	93
2700	95	100	2316	89
3000	90	90	2613	100
3000	95	100	2437	94
3000 Vivid White	90	110	2481	95
4000	95	100	2414	93
5000	80	90	Not Applicable	Not Applicable
5000	90	90	2825	109

LED Manufacturer: Luminus

LED Type: COB

LED Model: CXM-18 G3

Optic: Reflector

Beam Angle (°): 17/24/40/60

Electrical Information

System Power (w): 26

Input Voltage (v) & Frequency: 220-240V 50/60Hz

Output Voltage (v): 31-37

Current (mA): 700

Non-Dimmable: Tridonic LC 30W 700mA fixC SC ADV

Power Factor: 0.95

Efficiency (%): 88

Total Harmonic Distortion (%): <20

Ripple (%): ±5

Dimmable: Triac Dimming – Upon Request

1-10V Dimming – Upon Request

Dali Dimming – Upon Request