

# PRODUCT DATASHEET

## Model: L2T707 L3T707 L4T707

Category: LED Tracklight

Description: 31w LED Tracklight with Triac dimming



## General Information

Material: Aluminium

Fitting Colors: White/ Black/ Painted Silver

Rotation Angle (degree): 350

Tilting Angle (degree): 90

Track System: Available in single wire, 3 wire, 3 phase

IP Rating: 20

Working Temperature (°C): -5 - +35

Storage Temperature (°C): -20 - +50

Approval: CB



## Product Dimensions and Cut-out Information

Fitting Length (mm): 165

Diameter (mm): 85

Height (mm): Not Applicable

Cut-out Dimension (mm): Not Applicable

## Packing Information

Packaging Type: Individual box

Quantity per carton: 12

CBM per carton: 0.0329


Gross weight per carton (kgs): 13

## Lifespan

Lifetime (hours): 30000

Luminous Flux after 50000hours (lm): LM80 Comply

Dimension:

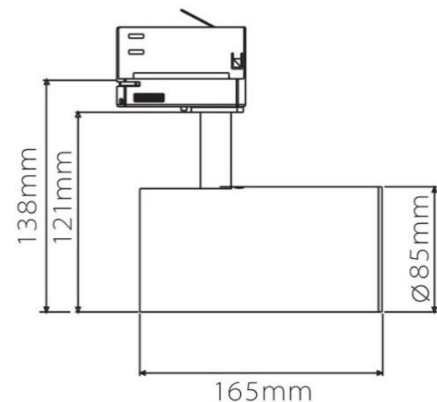

# PRODUCT DATASHEET

## Model: L2T707 L3T707 L4T707

Category: LED Tracklight

Description: 31w LED Tracklight with Triac dimming



## Light Technical Information

Color Temperature	CRI (Ra)	Gamut Index (GAI)	System Lumen	Lumen per Watt
2700	90	90	2914	81
2700	95	100	2784	77
3000	90	90	3142	82
3000	95	100	2934	82
3000 Vivid White	90	110	2986	83
4000	95	100	3131	87
5000	80	90	3924	109
5000	90	90	3396	94

LED Manufacturer: Luminus

LED Type: COB

LED Model: CXM-14 G3

Optic: Reflector

Beam Angle (°): 17/24/40/60

## Electrical Information

System Power (w): 36

Input Voltage (v) & Frequency: 220-240V 50/60Hz

Output Voltage (v): 31-37

Current (mA): 900

Triac dimming: RxPower

Power Factor: around 0.9

Efficiency (%): around 85

Total Harmonic Distortion (%): around 25

Ripple (%): around 10

Dimmable: 1-10V Dimming – Upon Request

Dali Dimming – Upon Request