

# PRODUCT DATASHEET

**Model: L2T707 L3T707 L4T707**

Category: LED Tracklight

Description: 31w LED Tracklight



## General Information

Material: Aluminum

Fitting Colors: White/ Black/ Painted Silver

Rotation Angle (degree): 350

Tilting Angle (degree): 90

Track System: Available in single wire, 3 wire, 3 phase

IP Rating: 20

Working Temperature (°C): -5 - +35

Storage Temperature (°C): -20 - +50

Approval: CB



## Product Dimensions and Cut-out Information

Fitting Length (mm): 165

Diameter (mm): 85

Height (mm): Not Applicable

Cut-out Dimension (mm): Not Applicable

## Packing Information

Packaging Type: Individual box

Quantity per carton: 12

CBM per carton: 0.0329


Gross weight per carton (kgs): 13

## Lifespan

Lifetime (hours): 50000

Luminous Flux after 50000hours (lm): LM80 Comply

Dimension:

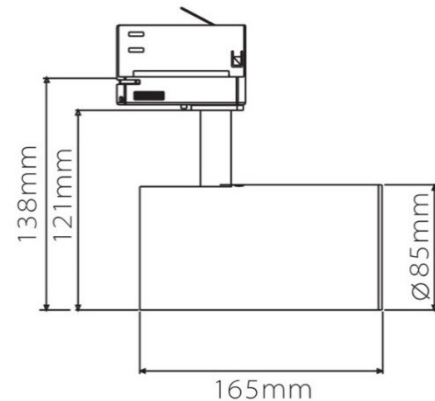

# PRODUCT DATASHEET

**Model: L2T707 L3T707 L4T707**

Category: LED Tracklight

Description: 31w LED Tracklight



## Light Technical Information

Color Temperature	CRI (Ra)	Gamut Index (GAI)	System Lumen	Lumen per Watt
2700	90	90	3199	91
2700	95	100	2995	86
3000	90	90	3471	99
3000	95	100	3141	90
3000 Vivid White	90	110	3298	94
4000	90	90	3732	107
4000	95	100	3256	93
5000	80	90	4264	122
5000	90	90	3607	103

LED Manufacturer: Luminus

LED Type: COB

LED Model: CXM-14 G4

Optic: Reflector

Beam Angle (°): 17/24/40/60

## Electrical Information

System Power (w): 35

Input Voltage (v) & Frequency: 220-240V 50/60Hz

Output Voltage (v): 31-37

Current (mA): 900

Non-Dimmable: LC 40W 900mA fixC SC ADV

Power Factor: 0.95

Efficiency (%): 89

Total Harmonic Distortion (%): <20

Ripple (%): ±5

Dimmable: Triac Dimming – Upon Request

1-10V Dimming – Upon Request

Dali Dimming – Upon Request