

PRODUCT DATASHEET

Model: L2T606 L3T606 L4T606

Category: LED Tracklight

Description: 30w LED Tracklight



General Information

Material: Aluminium

Fitting Colors: White/ Black/ Painted Silver

Rotation Angle (degree): 350

Tilting Angle (degree): 180

Track System: Available in single wire, 3 wire, 3 phase

IP Rating: 20

Working Temperature (°C): -5 - +35

Storage Temperature (°C): -20 - +50



Product Dimensions and Cut-out Information


Fitting Length (mm): 66

Diameter (mm): 565 x 35

Height (mm): Not Applicable

Cut-out Dimension (mm): Not Applicable

Dimension:

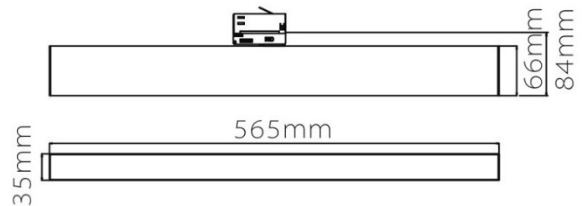

Packing Information

Packaging Type: Individual box

Quantity per carton: 10

CBM per carton: 0.0456

Gross weight per carton (kgs): 12.6

Lifespan

Lifetime (hours): 30000

Luminous Flux after 50000hours (lm): LM80 Comply

PRODUCT DATASHEET

Model: L2T606 L3T606 L4T606

Category: LED Tracklight

Description: 30w LED Tracklight



Light Technical Information

Color Temperature	CRI (Ra)	System Lumen	Lumen per Watt
2700	90	Not Applicable	Not Applicable
2700	95	Not Applicable	Not Applicable
3000	90	2502	79
3000	95	Not Applicable	Not Applicable
3000 Vivid White	90	Not Applicable	Not Applicable
4000	95	Not Applicable	Not Applicable
5000	80	Not Applicable	Not Applicable
5000	90	Not Applicable	Not Applicable

LED Manufacturer: Luminus

LED Type: SMD

LED Model: 3014

Optic: Diffuser

Beam Angle (°): 95

Electrical Information

System Power (w): 31

Input Voltage (v) & Frequency: 220-240V 50/60Hz

Output Voltage (v): 27-57

Current (mA): 900

Non-Dimmable: OT FIT 55/220-240/1A0 CS L AP

Power Factor: 0.9

Efficiency (%): 90

Total Harmonic Distortion (%): <25

Ripple (%): <5

Dimmable: Triac Dimming – Upon Request

1-10V Dimming – Upon Request

Dali Dimming – Upon Request