

# PRODUCT DATASHEET

**Model: L2T607 L3T607 L4T607**

Category: LED Tracklight

Description: 25w LED Tracklight



## General Information

Material: Aluminum

Fitting Colors: White/ Black/ Painted Silver

Rotation Angle (degree): 350

Tilting Angle (degree): 90

Track System: Available in single wire, 3 wire, 3 phase

IP Rating: 20

Working Temperature (°C): -5 - +35

Storage Temperature (°C): -20 - +50



## Product Dimensions and Cut-out Information


Fitting Length (mm): 202

Diameter (mm): 52

Height (mm): Not Applicable

Cut-out Dimension (mm): Not Applicable

Dimension:

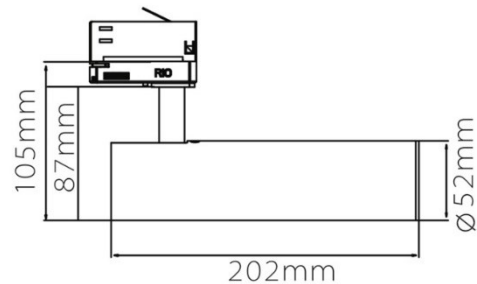

## Packing Information

Packaging Type: Individual box

Quantity per carton: 10

CBM per carton: 0.0198

Gross weight per carton (kgs): 11.3

## Lifespan

Lifetime (hours): 50000

Luminous Flux after 50000hours (lm): LM80 Comply

# PRODUCT DATASHEET

**Model: L2T607 L3T607 L4T607**

Category: LED Tracklight

Description: 25w LED Tracklight



## Light Technical Information

Color Temperature	CRI (Ra)	Gamut Index (GAI)	System Lumen	Lumen per Watt
2700	90	90	2222	79
2700	95	100	2122	76
3000	90	90	2390	85
3000	95	100	2234	80
3000 Vivid White	90	110	2271	81
4000	95	100	2377	85
5000	80	90	Not Applicable	Not Applicable
5000	90	90	2590	93

LED Manufacturer: Luminus

LED Type: COB

LED Model: CXM-11 Gen 3

Optic: Reflector

Beam Angle (°): 20/38/60

## Electrical Information

System Power (w): 28

Input Voltage (v) & Frequency: 220-240V 50/60Hz

Output Voltage (v): 31-37

Current (mA): 700

Non-Dimmable: Tridonic LC 30W 700mA fixC SC ADV

Power Factor: 0.95

Efficiency (%): 88

Total Harmonic Distortion (%): <20

Ripple (%): ±5

Dimmable: Triac Dimming – Upon Request

1-10V Dimming – Upon Request

Dali Dimming – Upon Request