

# PRODUCT DATASHEET

**Model: L2T705 L3T705 L4T705**

Category: LED Tracklight

Description: 12w LED Tracklight



## General Information

Material: Aluminum

Fitting Colors: White/ Black/ Painted Silver

Rotation Angle (degree): 350

Tilting Angle (degree): 90

Track System: Available in single wire, 3 wire, 3 phase

IP Rating: 20

Working Temperature (°C): -5 - +35

Storage Temperature (°C): -20 - +50



## Product Dimensions and Cut-out Information


Fitting Length (mm): 159

Diameter (mm): 63

Height (mm): Not Applicable

Cut-out Dimension (mm): Not Applicable

Dimension:

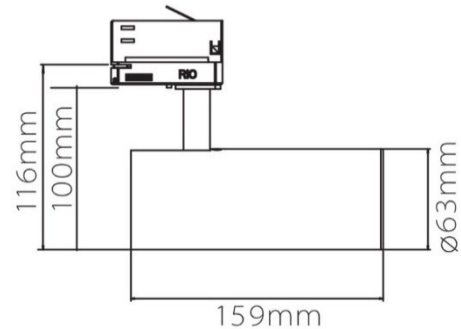

## Packing Information

Packaging Type: Individual box

Quantity per carton: 20

CBM per carton: 0.0401

Gross weight per carton (kgs): 14

## Lifespan

Lifetime (hours): 50000

Luminous Flux after 50000hours (lm): LM80 Comply

# PRODUCT DATASHEET

## Model: L2T705 L3T705 L4T705

Category: LED Tracklight

Description: 12w LED Tracklight



## Light Technical Information

Color Temperature	CRI (Ra)	Gamut Index (GAI)	System Lumen	Lumen per Watt
2700	90	90	1134	81
2700	95	100	1080	77
3000	90	90	1217	87
3000	95	100	1140	81
3000 Vivid White	90	110	1158	83
4000	95	100	1217	87
5000	80	90	Not Applicable	Not Applicable
5000	90	90	1318	94

LED Manufacturer: Luminus

LED Type: COB

LED Model: CLM-9 Gen 3

Optic: Reflector

Beam Angle (°): 15/24/40/60

## Electrical Information

System Power (w): 14

Input Voltage (v) & Frequency: 220-240V 50/60Hz

Output Voltage (v): 31-37

Current (mA): 350

Non-Dimmable: Tridonic LC 15W 350mA fixC SC ADV

Power Factor: 0.9

Efficiency (%): 83

Total Harmonic Distortion (%): <15

Ripple (%): ±15

Dimmable: Triac Dimming – Upon Request

1-10V Dimming – Upon Request

Dali Dimming – Upon Request