

PRODUCT DATASHEET

Model: L2T712 L4T712

Category: LED Tracklight

Description: 30W LED Tracklight with Integrated Driver & Track Adaptor



General Information

Material: Aluminium

Fitting Colors: White/ Black/ Painted Silver

Rotation Angle (degree): 350

Tilting Angle (degree): 90

Track System: Available in single wire, 3 wire, 3 phase

IP Rating: 20

Working Temperature (°C): -5- +35

Storage Temperature (°C): -20 - +50



Product Dimensions and Cut-out Information



Fitting Length (mm): 110

Diameter (mm): 85

Height (mm): Not Applicable

Cut-out Dimension (mm): Not Applicable

Dimension:

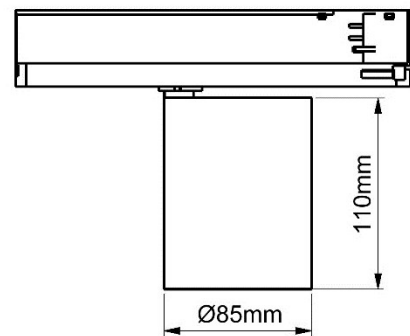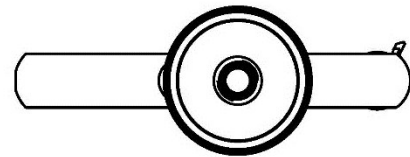

Lifespan

Lifetime (hours): 50000

Luminous Flux after 50000hours (lm): LM80 Comply

PRODUCT DATASHEET

Model: L2T712 L4T712

Category: LED Tracklight

Description: 30W LED Tracklight with Integrated Driver & Track Adaptor



Light Technical Information

Color Temperature	CRI (Ra)	Gamut Index (GAI)	System Lumen	Lumen per Watt
2700	90	90	2445	70
2700	95	100	2336	67
3000	90	90	2636	76
3000	95	100	2462	71
3000 Vivid White	90	110	2507	72
4000	95	100	2628	76
5000	80	90	Not Applicable	Not Applicable
5000	90	90	2850	82

LED Manufacturer: Luminus

LED Type: COB

LED Model: CXM-14 Gen 3

Optic: Reflector

Beam Angle (°): 17/24/40/60

Electrical Information

System Power (w): 35

Input Voltage (v) & Frequency: 220-240V 50/60Hz

Output Voltage (v): 31-37

Current (mA): 850

Non-Dimmable: TCI GA-016

Power Factor: 0.97

Efficiency (%): >86

Total Harmonic Distortion (%): Not Applicable

Ripple (%): 3

Dimmable: Triac Dimming – Upon Request

1-10V Dimming – Upon Request

Dali Dimming – Upon Request