

PRODUCT DATASHEET

Model: L2T714 L3T714 L4T714

Category: LED Tracklight

Description: 21W LED Tracklight



General Information

Material: Aluminum

Fitting Colors: White/ Black/ Painted Silver

Rotation Angle (degree): 350

Tilting Angle (degree): 90

Track System: Available in single wire, 3 wire, 3 phase

IP Rating: 20

Working Temperature (°C): -5- +35

Storage Temperature (°C): -20 - +50



Product Dimensions and Cut-out Information

Fitting Length (mm): 115

Diameter (mm): 85

Height (mm): Not Applicable


Cut-out Dimension (mm): Not Applicable

Lifespan

Lifetime (hours): 50000

Luminous Flux after 50000hours (lm): LM80 Comply

Dimension:

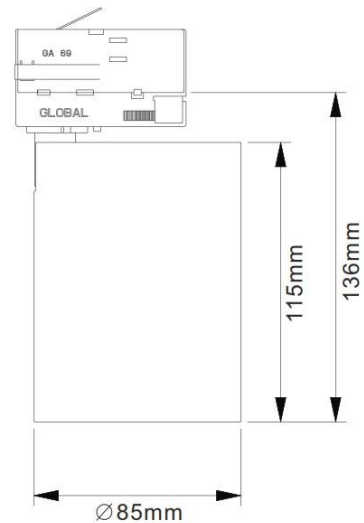

PRODUCT DATASHEET

Model: L2T714 L3T714 L4T714

Category: LED Tracklight

Description: 21W LED Tracklight



Light Technical Information

Color Temperature	CRI (Ra)	Gamut Index (GAI)	System Lumen	Lumen per Watt
2700	90	90	2095	84
2700	95	100	1964	79
3000	90	90	2195	88
3000	95	100	2060	82
3000 Vivid White	90	110	2164	87
4000	90	90	2448	98
4000	95	100	2137	85
5000	80	90	2801	112
5000	90	90	2365	95

LED Manufacturer: Luminus

LED Type: COB

LED Model: CXM-9 Gen 4

Optic: Reflector

Beam Angle (°): 15/24/36

Electrical Information

System Power (w): 25

Input Voltage (v) & Frequency: 220-240V 50/60Hz

Output Voltage (v): 31-37

Current (mA): 600

Non-Dimmable: Tridonic LC 24W 600mA fixC R ADV

Power Factor: 0.97

Efficiency (%): 85

Total Harmonic Distortion (%): <12

Ripple (%): ±5

Dimmable: Triac Dimming – Upon Request

1-10V Dimming – Upon Request

Dali Dimming – Upon Request