

# PRODUCT DATASHEET

**Model: L2T517 L3T517 L4T517**

Category: LED Tracklight

Description: 13w LED Tracklight with adjustable beam angle



## General Information

Material: Aluminium

Fitting Colors: Matte White/ Black/ Satin Silver

Rotation Angle (degree): 350

Tilting Angle (degree): 90

Track System: Available in single wire, 3 wire, 3 phase

IP Rating: 20

Working Temperature (°C): -5 - +35

Storage Temperature (°C): -20 - +50



## Product Dimensions and Cut-out Information

Fitting Length (mm): 135.5-159

Diameter (mm): 65

Height (mm): Not Applicable

Cut-out Dimension (mm): Not Applicable

## Packing Information

Packaging Type: Individual box

Quantity per carton: 20

CBM per carton: 0.04


Gross weight per carton (kgs): 15.7

## Lifespan

Lifetime (hours): 30000

Luminous Flux after 50000hours (lm): LM80 Comply

Dimension:

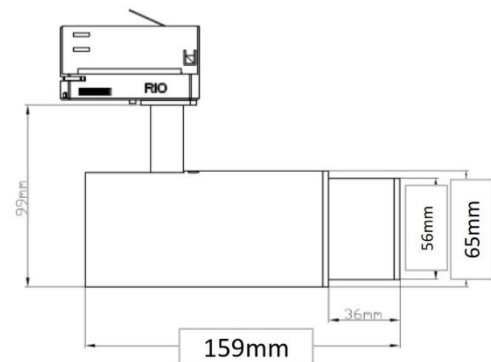

# PRODUCT DATASHEET

## Model: L2T517 L3T517 L4T517

Category: LED Tracklight

Description: 13w LED Tracklight with adjustable beam angle



## Light Technical Information

Color Temperature	CRI (Ra)	Gamut Index (GAI)	System Lumen	Lumen per Watt
2700	90	90	703	46
2700	95	100	676	44
3000	90	90	762	50
3000	95	100	713	46
3000 Vivid White	90	110	723	47
4000	95	100	762	50
5000	90	90	824	54

LED Manufacturer: Luminus

LED Type: COB

LED Model: CXM-6 Gen 4

Optic: Lens

Beam Angle (°): 5-50

## Electrical Information

System Power (w): 15

Input Voltage (v) & Frequency: 220-240V 50/60Hz

Output Voltage (v): 31-37

Current (mA): 350

Non-Dimmable: Tridonic LC 14W 350mA fixC R ADV

Power Factor: 0.96

Efficiency (%): 84

Total Harmonic Distortion (%): <9

Ripple (%): ±5

Dimmable: Triac Dimming – Upon Request

1-10V Dimming – Upon Request

Dali Dimming – Upon Request