

# PRODUCT DATASHEET

**Model: L2T616 L3T616 L4T616**

Category: LED Tracklight

Description: 25w LED Tracklight



## General Information

Material: Aluminum

Fitting Colors: Matte White/ Black/ Satin Silver

Rotation Angle (degree): Not Applicable

Tilting Angle (degree): Not Applicable

Track System: Available in single wire, 3 wire, 3 phase

IP Rating: 20

Working Temperature (°C): -5 - +35

Storage Temperature (°C): -20 - +50



## Product Dimensions and Cut-out Information


Fitting Length (mm): 861

Diameter (mm): Not Applicable

Height (mm): 88

Cut-out Dimension (mm): Not Applicable

Dimension

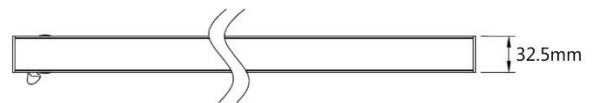


## Packing Information

Packaging Type: Individual box

Quantity per carton: 10

CBM per carton: 0.0514

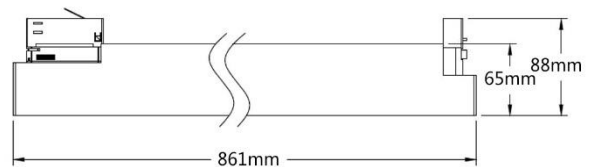

## Lifespan

Lifetime (hours): 50000

Luminous Flux after 50000hours (lm): LM80 Comply

# PRODUCT DATASHEET

## Model: L2T616 L3T616 L4T616

Category: LED Tracklight

Description: 25w LED Tracklight



## Light Technical Information

Color Temperature	CRI (Ra)	Gamut Index (GAI)	System Lumen	Lumen per Watt
2700	90	90	1878	65
2700	95	100	1772	61
3000	90	90	1984	68
3000	95	100	1843	64
4000	90	90	2126	73
4000	95	100	1949	67
5000	80	90	2552	88

LED Manufacturer: Luminus

LED Type: SMD

LED Model: MP-3030-1100-30-90

Optic: Diffuser

Beam Angle (°): 108

## Electrical Information

System Power (w): 29

Input Voltage (v) & Frequency: 220-240V 50/60Hz

Output Voltage (v): 31-37

Current (mA): 700

Non-Dimmable: OSRAM OT FIT 35/220-240/700 CS L G2

Power Factor: 0.98

Efficiency (%): 85

Total Harmonic Distortion (%): <10

Ripple (%): <5

Dimmable: Not Applicable