

PRODUCT DATASHEET

Model: L2T616 L3T616 L4T616

Category: LED Tracklight

Description: 29w LED Tracklight



General Information

Material: Aluminum

Fitting Colors: Matte White/ Black/ Satin Silver

Rotation Angle (degree): Not Applicable

Tilting Angle (degree): Not Applicable

Track System: Available in single wire, 3 wire, 3 phase

IP Rating: 20

Working Temperature (°C): -5 - +35

Storage Temperature (°C): -20 - +50



Product Dimensions and Cut-out Information


Fitting Length (mm): 861

Diameter (mm): Not Applicable

Height (mm): 88

Cut-out Dimension (mm): Not Applicable

Dimension




Packing Information

Packaging Type: Individual box

Quantity per carton: 10

CBM per carton: 0.0514

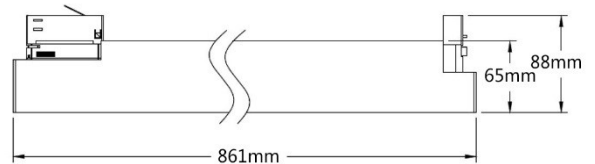

Lifespan

Lifetime (hours): 50000

Luminous Flux after 50000hours (lm): LM80 Comply

PRODUCT DATASHEET

Model: L2T616 L3T616 L4T616

Category: LED Tracklight

Description: 29w LED Tracklight



Light Technical Information

| Color Temperature | CRI (Ra) | Gamut Index (GAI) | System Lumen | Lumen per Watt |
|-------------------|----------|-------------------|--------------|----------------|
| 2700 | 90 | 90 | 2179 | 70 |
| 2700 | 95 | 100 | 2055 | 66 |
| 3000 | 90 | 90 | 2302 | 74 |
| 3000 | 95 | 100 | 2138 | 69 |
| 4000 | 90 | 90 | 2466 | 80 |
| 4000 | 95 | 100 | 2261 | 73 |
| 5000 | 80 | 90 | 2960 | 95 |

LED Manufacturer: Luminus

LED Type: SMD

LED Model: MP-3030-1100-30-90

Optic: Diffuser

Beam Angle (°): 108

Electrical Information

System Power (w): 32

Input Voltage (v) & Frequency: 220-240V 50/60Hz

Output Voltage (v): 31-37

Current (mA): 800

Non-Dimmable: OSRAM OT FIT 55/220-240/1A0 CS L AP

Power Factor: 0.98

Efficiency (%): 90

Total Harmonic Distortion (%): <10

Ripple (%): <5

Dimmable: Not Applicable