

PRODUCT DATASHEET

Model: L2T626 L3T626 L4T626

Category: LED Tracklight

Description: 38w LED Tracklight



General Information

Material: Aluminum

Fitting Colors: Matte White/ Black/ Satin Silver

Rotation Angle (degree): Not Applicable

Tilting Angle (degree): Not Applicable

Track System: Available in single wire, 3 wire, 3 phase

IP Rating: 20

Working Temperature (°C): -5 - +35

Storage Temperature (°C): -20 - +50



Product Dimensions and Cut-out Information


Fitting Length (mm): 1200

Diameter (mm): Not Applicable

Height (mm): 88

Cut-out Dimension (mm): Not Applicable

Dimension

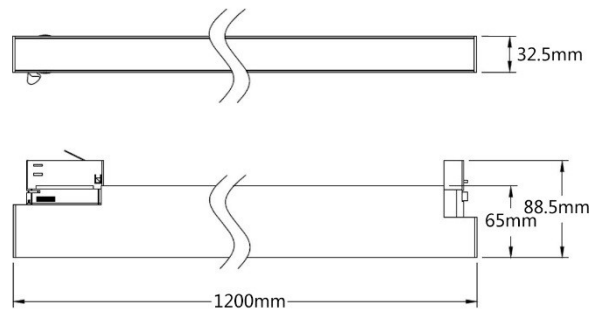

Packing Information

Packaging Type: Individual box

Quantity per carton: 10

CBM per carton: 0.071

Lifespan

Lifetime (hours): 50000

Luminous Flux after 50000hours (lm): LM80 Comply

PRODUCT DATASHEET

Model: L2T626 L3T626 L4T626

Category: LED Tracklight

Description: 38w LED Tracklight



Light Technical Information

Color Temperature	CRI (Ra)	Gamut Index (GAI)	System Lumen	Lumen per Watt
2700	90	90	2896	68
2700	95	100	2732	64
3000	90	90	3060	71
3000	95	100	2841	67
4000	90	90	3279	77
4000	95	100	3005	71
5000	80	90	3934	93

LED Manufacturer: Luminus

LED Type: SMD

LED Model: MP-3030-1100-30-90

Optic: Diffuser

Beam Angle (°): 108

Electrical Information

System Power (w): 42

Input Voltage (v) & Frequency: 220-240V 50/60Hz

Output Voltage (v): 31-37

Current (mA): 1050

Non-Dimmable: OSRAM OT FIT 55/220-240/1A0 CS L AP

Power Factor: 0.98

Efficiency (%): 90

Total Harmonic Distortion (%): <10

Ripple (%): <5

Dimmable: Not Applicable