

PRODUCT DATASHEET

Model: L4TS630

Category: LED Pendant Light

Description: 5w LED Pendant Light



General Information

Material: Aluminum

Fitting Colors: White/ Black

Rotation Angle (degree): Not Applicable

Tilting Angle (degree): Not Applicable

Track System: Available in single wire, 3 wire, 3 phase

IP Rating: 20

Working Temperature (°C): -5 - +35

Storage Temperature (°C): -20 - +50



Product Dimensions and Cut-out Information


Fitting Length (mm): 300

Diameter (mm): 32

Height (mm): Not Applicable

Cut-out Dimension (mm): Not Applicable

Dimension:

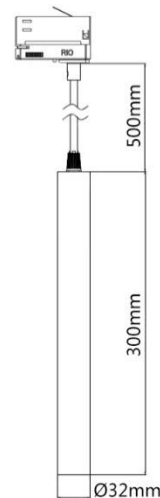

Packing Information

Packaging Type: Individual box

Quantity per carton: 20

Lifespan

Lifetime (hours): 30000

Luminous Flux after 30000hours (lm): LM80 Comply

PRODUCT DATASHEET

Model: L4TS630

Category: LED Pendant Light

Description: 5w LED Pendant Light



Light Technical Information

Color Temperature	CRI (Ra)	Gamut Index (GAI)	System Lumen	Lumen per Watt
2700	90	90	427	73
2700	95	100	401	69
3000	90	90	453	77
3000	95	100	417	71
4000	90	90	514	88
4000	95	100	468	80
5000	80	90	571	98
5000	90	90	484	83

LED Manufacturer: Luminus

LED Type: COB

LED Model: CXM-4 Gen 4

Optic: Reflector

Beam Angle (°): 17/24/36

Electrical Information

System Power (w): 5.4

Input Voltage (v) & Frequency: 100-240V 50/60Hz

Output Voltage (v): 31-37

Current (mA): 150

Non-Dimmable: RiO 06FLE15-RXY04

Efficiency (%): 90

Dimmable: 1-10V Dimming – Upon Request

Dali Dimming – Upon Request