

# PRODUCT DATASHEET

**Model: L2T707 L3T707 L4T707**

Category: LED Tracklight

Description: 31w LED Tracklight with Tunable White



## General Information

Material: Aluminum

Fitting Colors: Matte White/ Black

Rotation Angle (degree): 355

Tilting Angle (degree): 90

Track System: Available in single wire, 3 wire, 3 phase

IP Rating: 20

Working Temperature (°C): -5 - +35

Storage Temperature (°C): -20 - +50



## Product Dimensions and Cut-out Information


Fitting Length (mm): 150

Diameter (mm): 85

Height (mm): Not Applicable

Cut-out Dimension (mm): Not Applicable

Dimension:

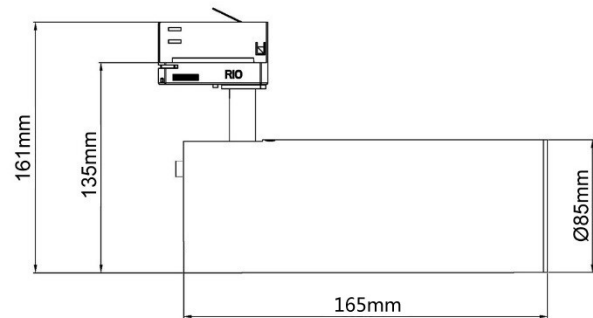

## Packing Information

Packaging Type: Individual box

Quantity per carton: 12

CBM per carton: 0.033

Gross weight per carton (kgs): 13

## Lifespan

Lifetime (hours): 30000

Luminous Flux after 50000hours (lm): LM80 Comply

# PRODUCT DATASHEET

## Model: L2T707 L3T707 L4T707

Category: LED Tracklight

Description: 31w LED Tracklight with Tunable White



## Light Technical Information

| Color Temperature | CRI (Ra) | Gamut Index (GAI) | System Lumen | Lumen per Watt |
|-------------------|----------|-------------------|--------------|----------------|
| 2700              | 90       | 90                | 2753         | 78             |
| 3000              | 90       | 90                | 2801         | 80             |
| 4000              | 90       | 90                | 2930         | 83             |
| 5000              | 90       | 90                | 3095         | 88             |
| 6500              | 90       | 90                | 3242         | 91             |

LED Manufacturer: Bridgelux

LED Type: COB

LED Model: BXRV-TR

Optic: Reflector

Beam Angle (°): 19/28/40

## Electrical Information

System Power (w): 36

Input Voltage (v) & Frequency: 100-277V 50/60Hz

Output Voltage (v): 32-38

Current (mA): 900

0-10V Dimmable: RiO Dimmable driver

Power Factor: 0.95

Efficiency (%): 88

Total Harmonic Distortion (%): <15

Ripple (%): Not Application