

# PRODUCT DATASHEET

## Model: LDL156

Category: LED Adjustable Downlight

Description: 5w LED Adjustable Downlight



## General Information

Material: Aluminum

Fitting Colors: White/ Black/ Painted Silver

Rotation Angle (degree): 360

Tilting Angle (degree): 25

Track System: Not Applicable

IP Rating: 20

Working Temperature (°C): -5 - +35

Storage Temperature (°C): -20 - +50



## Product Dimensions and Cut-out Information

Fitting Length (mm): Not Applicable

Diameter (mm): 35

Height (mm): 60


Cut-out Dimension (mm): 28

## Lifespan

Lifetime (hours): 50000

Luminous Flux after 50000hours (lm): LM80 Comply

Dimension:

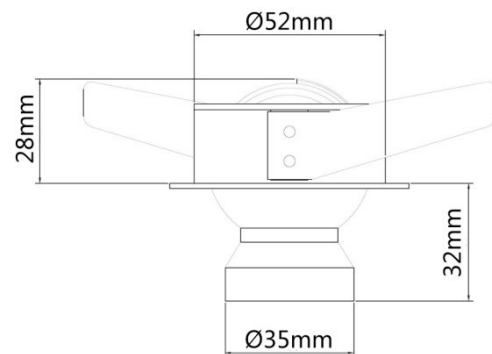

# PRODUCT DATASHEET

## Model: LDL156

Category: LED Adjustable Downlight

Description: 5w LED Adjustable Downlight



## Light Technical Information

Color Temperature	CRI (Ra)	Gamut Index (GAI)	System Lumen	Lumen per Watt
2700	90	90	435	71
2700	95	100	409	67
3000	90	90	497	82
3000	95	100	425	70
4000	90	90	488	80
4000	95	100	446	73
5000	80	90	582	95
5000	90	90	493	81

LED Manufacturer: Luminus

LED Type: COB

LED Model: CXM-4 G4

Optic: Reflector

Beam Angle (°): 17/24

## Electrical Information

System Power (w): 6

Input Voltage (v) & Frequency: 220-240V 50/60Hz

Output Voltage (v): 35-40

Current (mA): 150

Non-Dimmable: Osram OT FIT 8/200-240/180 CS I MINI

Power Factor: 0.95

Efficiency (%): 86

Total Harmonic Distortion (%): <15

Ripple (%): <3

Dimmable: Triac Dimming – Upon Request

1-10V Dimming – Upon Request

Dali Dimming – Upon Request