

PRODUCT DATASHEET

Model: LTM515

Category: LED Tracklight

Description: 15w LED Tracklight



General Information

Material: Aluminum

Fitting Colors: White/ Black/ Painted Silver

Rotation Angle (degree): 350

Tilting Angle (degree): 60

Track System: Available in single wire, 3 wire

IP Rating: 20

Working Temperature (°C): -5 - +35

Storage Temperature (°C): -20 - +50



Product Dimensions and Cut-out Information


Fitting Length (mm): 90

Diameter (mm): 55

Height (mm): Not Applicable

Cut-out Dimension (mm): Not Applicable

Dimension:

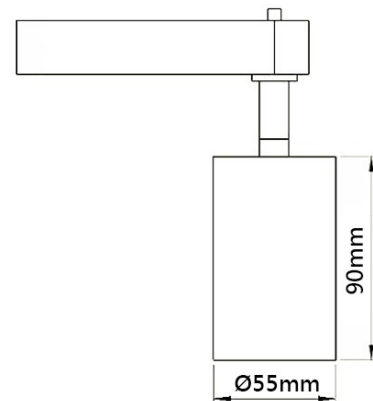

Packing Information

Packaging Type: Individual box

Quantity per carton: 20

CBM per carton: 0.0384

Gross weight per carton (kgs): 6.8

Lifespan

Lifetime (hours): 30000

Luminous Flux after 50000hours (lm): LM80 Comply

PRODUCT DATASHEET

Model: LTM515

Category: LED Tracklight

Description: 15w LED Tracklight



Light Technical Information

Color Temperature	CRI (Ra)	Gamut Index (GAI)	System Lumen	Lumen per Watt
2700	90	90	1061	59
3000	90	90	1111	62
4000	90	90	1180	66
5000	90	90	1209	67

LED Manufacturer: Bridgelux

LED Type: COB

LED Model: BXKC-30G1501-B-13

Optic: Reflector

Beam Angle (°): 15/25/38/55

Electrical Information

System Power (w): 18

Input Voltage (v) & Frequency: 220-240V 50/60Hz

Output Voltage (v): 32.4-39.2

Current (mA): 500

Non-Dimmable: RiO Non-dimmable Driver

Power Factor: 0.92

Efficiency (%): 85

Total Harmonic Distortion (%): <15

Ripple (%): ±3

Dimmable: Triac Dimming – Upon Request

1-10V Dimming – Upon Request

Dali Dimming – Upon Request