

# PRODUCT DATASHEET

**Model: L2T729 L3T729 L4T729**

Category: LED Tracklight

Description: 42W LED Tracklight



## General Information

Material: Aluminum

Fitting Colors: Matte White/ Black

Rotation Angle (degree): 350

Tilting Angle (degree): 90

Track System: Available in single wire, 3 wire, 3 phase

IP Rating: 20

Working Temperature (°C): -5- +35

Storage Temperature (°C): -20 - +50



## Product Dimensions and Cut-out Information


Fitting Length (mm): 133

Diameter (mm): 120

Height (mm): 214

Cut-out Dimension (mm): Not Applicable

Dimension:

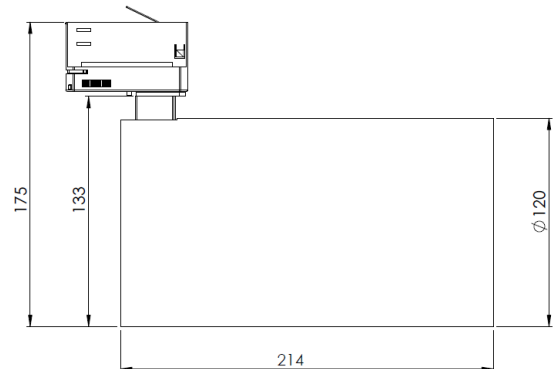

## Packing Information

Packaging Type: Individual box

Quantity per carton: 12

CBM per carton: 0.040

Gross weight per carton (kgs): 9.6

## Lifespan

Lifetime (hours): 50000

Luminous Flux after 50000hours (lm): LM80 Comply

# PRODUCT DATASHEET

**Model: L2T729 L3T729 L4T729**

Category: LED Tracklight

Description: 42W LED Tracklight



## Light Technical Information

Color Temperature	CRI (Ra)	System Lumen	Lumen per Watt
2700	90	3748	78
2700	95	3239	67
3000	90	3910	81
3000	95	3370	70
4000	90	4104	86
4000	95	3722	78
5000	90	4298	90
5000	95	3711	77

LED Manufacturer: Luminus

LED Type: COB

LED Model: CXM-18 Gen 4

Optic: Reflector

Beam Angle (°): 24 / 40

## Electrical Information

System Power (w): 48

Input Voltage (v) & Frequency: 220-240V 50/60Hz

Output Voltage (v): 31-37

Current (mA): 1200

Driver: Rio Non-Dimmable driver

Power Factor: 0.90

Efficiency (%): 87

Total Harmonic Distortion (%): <15

Ripple (%): ±1

Dimmable: Triac Dimming – Upon Request

1-10V Dimming – Upon Request

Dali Dimming – Upon Request