



[APOLLO] _ L4T605-CCT

27w LED Round Panel Tracklight with CCT Switchable

Rio
LIGHT DYNAMIC

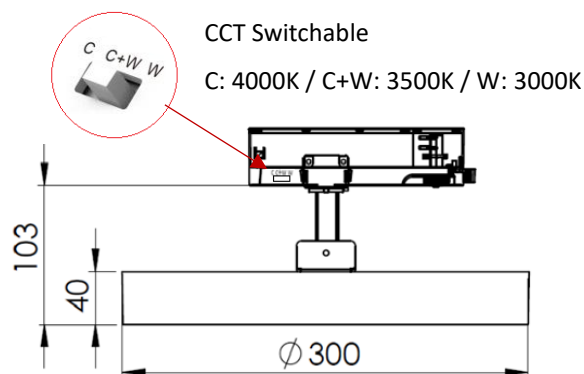

General Information

Housing Material:	Aluminium + Iron	Diffuser Material:	PC
Colour (RAL):	White(9016) - Black(9004)	Weight:	1620g
Dimensions (L-W-H):	Dia.300mm - H40mm	Cuthole :	N/A
Connection:	Track Adapter (3phase)	Installation:	Track mounted
Rotation Angle:	350°	Tilting Angle:	50°
Temperature:	-20 ~ +35°C	Accessories:	N/A

Photometrical Data

LED Manufacturer:	Samsung	LED Type:	SMD2835
CCT:	3000K - 3500K(Mix) - 4000K	CRI(Minimum):	90
lm system (±5%):	3204lm - 3362lm - 3234lm	lm source:	3980lm - 4183lm - 4026lm
Luminous Efficiency:	104lm/w - 114lm/w - 106lm/w	MacAdam:	5
Optic:	Microprismatic Diffuser	Beam Angle:	96°
UGR:	<26	LifeSpan (Ta25°C):	>50.000h - L70B50

Electrical Data

Driver:	KGP	Input Voltage:	220-240VAC 50/60Hz
Output Voltage:	10-42VDC	Output Current:	800mA
Power Factor:	0.95	Current Ripple:	±5%
W system:	30.5W	Ballast Losses:	3.5W
Control:	ON/OFF	Minimum Dimming:	N/A
Inrush Current:	18A / 2.8μs	Max No. of Units	B10/13/16 = 33/43/53
		per MCB:	C10/13/16 = 53/69/85