


LDL251

2.5w LED Downlight

Rio
LIGHT DYNAMIC

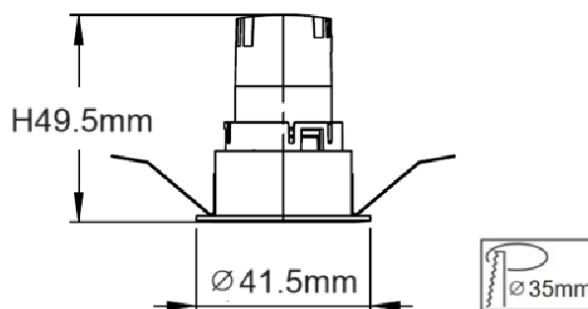

General Information

Housing Material:	Aluminium	Diffuser Material:	N/A
Colour (RAL):	White(9016) - Black(9004)	Weight:	36g (Lamp)
Dimensions (L-W-H):	Dia.41.5mm – H49.5mm	Cut hole :	35mm
Connection:	AC Connector	Installation:	Recessed Mounted
Rotation Angle:	N/A	Tilting Angle:	N/A
Temperature:	-20 ~ +35°C	Accessories:	N/A

Photometrical Data

LED Manufacturer:	Luminus	LED Type:	CXM-3
CCT:	2700K - 3000K - 4000K	CRI(Minimum):	90
lm system (±5%):	190lm - 201lm - 211lm	lm Module:	216lm - 228lm - 240lm
Luminous Efficiency:	58lm/w - 61lm/w - 64lm/w	MacAdam:	3
Optic:	Reflector + Anti-Dazzle Cover	Beam Angle:	18°/24°/38°
UGR:	<19	LifeSpan (Ta25°C):	>50.000h - L70B50

Electrical Data

Driver:	LIFUD	Input Voltage:	220-240VAC 50/60Hz
Output Voltage:	30-40VDC	Output Current:	70mA
Displacement Factor:	>0.5	Current Ripple:	±5%
W system:	3.3W	Ballast Losses:	0.9W
Control:	ON/OFF	Minimum Dimming:	N/A
Inrush Current:	20A / 110µs	Max No. of Units	B10/13/16 = 40/-/65
		per MCB:	C10/13/16 = 40/-/85

LDL251

2.5w LED Downlight



Accessories

			
AS	BK	CH	RB