


[MODULE] _ LLR17-DU

4w LED Module With AC Input

RiO[®]
LIGHT DYNAMIC

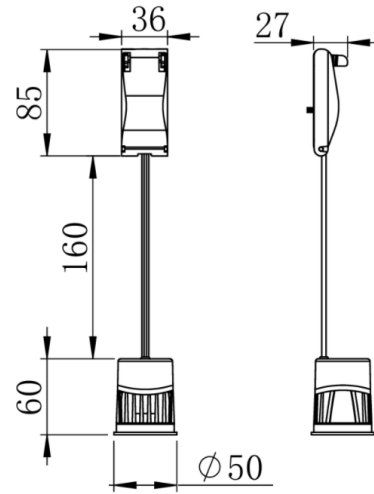

General Information

Housing Material:	Aluminium + PC	Diffuser Material:	PC
Colour (RAL):	Grey + Silver	Weight:	129g
Dimensions (L-W-H):	Dia.50mm – H60mm	Cuthole:	N/A
Connection:	AC Connector (Driver Box)	Installation:	N/A
Rotation Angle:	N/A	Tilting Angle:	N/A
Temperature:	-20 ~ +35°C	Accessories:	N/A

Photometrical Data

LED Manufacturer:	BRIDGELUX	LED Type:	COB
CCT:	2700K - 3000K - 4000K	CRI(Minimum):	90
lm system (±5%):	588lm – 616lm - 619lm	lm source:	653lm - 684lm - 688lm
Luminous Efficiency:	116lm/w - 121lm/w - 121lm/w	MacAdam:	3
Optic:	Alanod Reflector	Beam Angle:	24°/36°
UGR:	<19	LifeSpan (Ta25°C):	>50.000h - L70B50

Electrical Data

Driver:	RIO	Input Voltage:	220-240VAC 50/60Hz
Output Voltage:	32-40VDC	Output Current:	120mA
Power Factor:	>0.9	Current Ripple:	±5%
W system:	5.1W	Ballast Losses:	1.3W
Control:	Triac dimming	Minimum Dimming:	10%