


[MATRIX-L] _ LX4TL01-CCT

33w LED Linear Panel Tracklight (Power & CCT Switchable)

Rio
LIGHT DYNAMIC

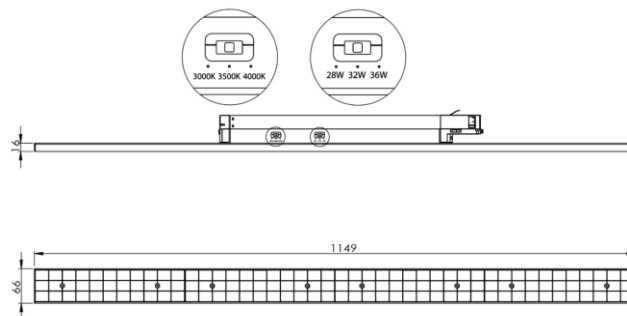

General Information

Housing Material:	Aluminium	Diffuser Material:	PMMA
Colour (RAL):	White(9016) - Black(9004)	Weight:	1440g
Dimensions (L-W-H):	L1149*W66*H16mm	Cuthole :	N/A
Connection:	Track Adapter (3phase)	Installation:	Track mounted
Rotation Angle:	N/A	Tilting Angle:	N/A
Temperature:	-20 ~ +35°C	Accessories:	N/A

Photometrical Data

LED Manufacturer:	TYF	LED Type:	PCT3030 (11S12P)
CCT:	3000K - 3500K - 4000K	CRI(Minimum):	90
lm system (±5%):	3935lm - 4129lm - 4058lm	lm source:	5023lm - 5250lm - 5183lm
Luminous Efficiency:	112lm/w - 121lm/w - 115lm/w	MacAdam:	6
Optic:	Lens	Beam Angle:	60° / 90° / SA15° / DA20°
UGR:	<26	LifeSpan (Ta25°C):	>50.000h - L70B50

Electrical Data

Driver:	AGT (M5-I45CC-1000)	Input Voltage:	220-240VAC 50/60Hz
Output Voltage:	25-40VDC	Output Current:	1000mA (Max)
Power Factor:	>0.9	PstLM / SVM:	≤1 / ≤0.4
W system:	35.4W	Ballast Losses:	3.2W
Control:	ON/OFF	Minimum Dimming:	N/A
Inrush Current:	30A / 200μs	Max No. of Units	B10/13/16 = 13/-/20
		per MCB:	C10/13/16 = 21/-/35

Note: The system power switchable range is 28W / 32W / 36W.