

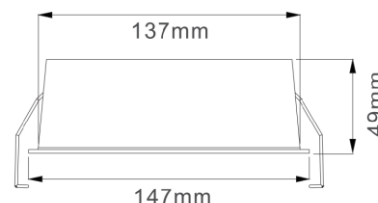


[BRICK] _ LXD105

10w LED Linear Downlight

RiO
LIGHT DYNAMIC



General Information

Housing Material:	Aluminium	Diffuser Material:	N/A
Colour (RAL):	White(9016) - Black(9004)	Weight:	195g (Lamp)
Dimensions (L-W-H):	147*45*49mm	Cut hole :	140*35mm
Connection:	AC Connector	Installation:	Recessed Mounted
Rotation Angle:	N/A	Tilting Angle:	N/A
Temperature:	-20 ~ +35°C	Accessories:	N/A

Photometrical Data

LED Manufacturer:	Luminus	LED Type:	SST-12
CCT:	2700K - 3000K - 4000K	CRI(Minimum):	95
lm system (±5%):	727lm - 782lm - 883lm	lm source:	863lm - 925lm - 1044lm
Luminous Efficiency:	62lm/w - 67lm/w - 76lm/w	MacAdam:	3
Optic:	Reflector + Anti-glare Cover	Beam Angle:	15°/30°/45°
UGR:	<16	LifeSpan (Ta25°C):	>50.000h - L70B50

Electrical Data

Driver:	EAGLERISE	Input Voltage:	220-240VAC 50/60Hz
Output Voltage:	13-17VDC	Output Current:	700mA
Displacement Factor:	>0.7	SVM / Pst:	≤0.4 / ≤1
W system:	11.7W	Ballast Losses:	1.8W
Control:	ON/OFF	Minimum Dimming:	N/A
Inrush Current:	8.44A / 80μs	Max No. of Units	B10/13/16 = 26/-/42
		per MCB:	C10/13/16 = 26/-/42