
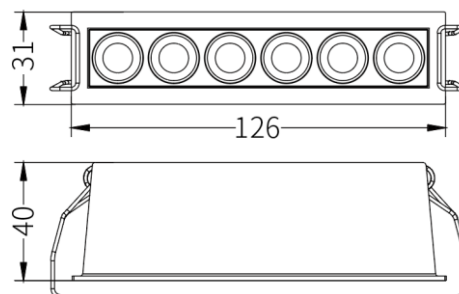


# [BRICK] \_ LXD106

9w LED Linear Downlight



## General Information

Housing Material:	Aluminium	Diffuser Material:	PC
Colour (RAL):	White(9016) - Black(9004)	Weight:	150g (Lamp)
Dimensions (L-W-H):	126*31*40mm	Cuthole :	122*27mm
Connection:	AC Connector	Installation:	Recessed Mounted
Rotation Angle:	N/A	Tilting Angle:	N/A
Temperature:	-20 ~ +35°C	Accessories:	Anti-glare Cover

## Photometrical Data

LED Manufacturer:	Luminus	LED Type:	SST-12
CCT:	2700K - 3000K - 4000K	CRI(Minimum):	95
lm system (±5%):	672lm - 722lm - 823lm	lm source:	791lm - 849lm - 968lm
Luminous Efficiency:	65lm/w - 70lm/w - 80lm/w	MacAdam:	3
Optic:	Reflector + Anti-glare Cover	Beam Angle:	30°/40°
UGR:	<16	LifeSpan (Ta25°C):	>50.000h - L70B50

## Electrical Data


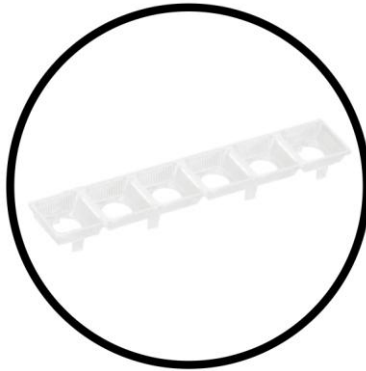


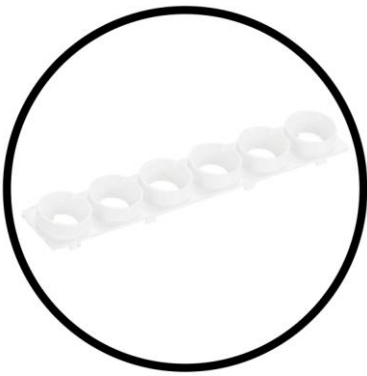

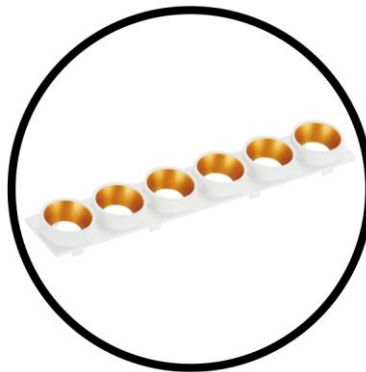
Driver:	LIFUD	Input Voltage:	220-240VAC 50/60Hz
Output Voltage:	14-24VDC	Output Current:	500mA
Displacement Factor:	>0.7	SVM / Pst:	≤0.4 / ≤1
W system:	10.3W	Ballast Losses:	1.8W
Control:	ON/OFF	Minimum Dimming:	N/A
Inrush Current:	9A / 120µs	Max No. of Units	B10/13/16 = 30/-/50
		per MCB:	C10/13/16 = 60/-/90

# [BRICK] \_ LXD106

9w LED Linear Downlight



## Accessories

Anti-glare Cover List		
Square Anti-glare cover		
	Black	Transparent
Cylinder Anti-glare cover		
	Black	Black+ Golden
		
White	White+Black	White+Golden