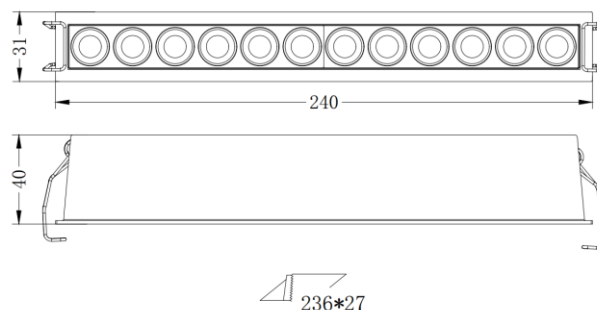


[BRICK] _ LXD112

18w LED Linear Downlight



General Information

Housing Material:	Aluminium	Diffuser Material:	PC
Colour (RAL):	White(9016) - Black(9004)	Weight:	285g (Lamp)
Dimensions (L-W-H):	240*31*40mm	Cuthole :	236*27mm
Connection:	AC Connector	Installation:	Recessed Mounted
Rotation Angle:	N/A	Tilting Angle:	N/A
Temperature:	-20 ~ +35°C	Accessories:	Anti-glare Cover

Photometrical Data

LED Manufacturer:	Luminus	LED Type:	SST-12
CCT:	2700K - 3000K - 4000K	CRI(Minimum):	95
lm system (±5%):	1276lm - 1390lm - 1588lm	lm source:	1501lm - 1635lm - 1868lm
Luminous Efficiency:	66lm/w - 72lm/w - 82lm/w	MacAdam:	3
Optic:	Reflector + Anti-glare Cover	Beam Angle:	30°/40°
UGR:	<16	LifeSpan (Ta25°C):	>50.000h - L70B50

Electrical Data


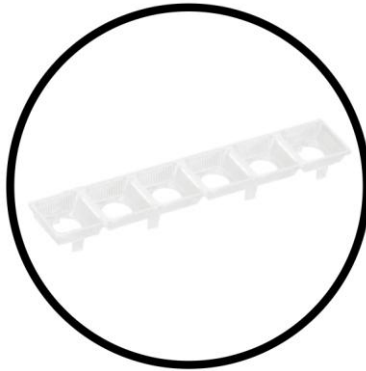


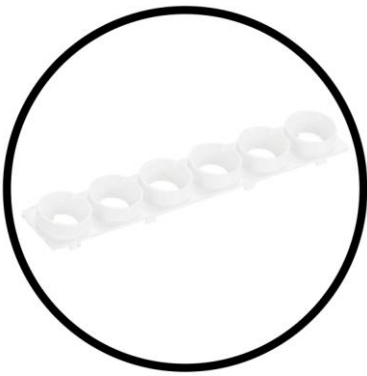

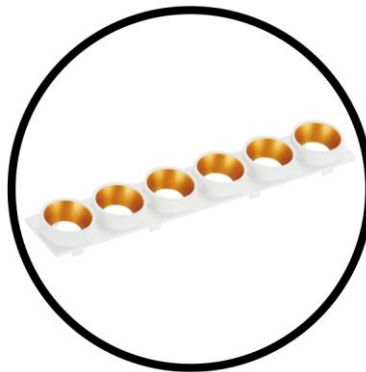
Driver:	LIFUD	Input Voltage:	220-240VAC 50/60Hz
Output Voltage:	25-42VDC	Output Current:	500mA
Power Factor:	>0.96	SVM / Pst:	≤0.4 / ≤1
W system:	19.3W	Ballast Losses:	2W
Control:	ON/OFF	Minimum Dimming:	N/A
Inrush Current:	20A / 150μs	Max No. of Units	B10/13/16 = 30/-/48
		per MCB:	C10/13/16 = 33/-/53

[BRICK] _ LXD112

18w LED Linear Downlight



Accessories

Anti-glare Cover List		
Square Anti-glare cover		
	Black	Transparent
Cylinder Anti-glare cover		
	Black	Black+ Golden
		
White	White+Black	White+Golden