


[BRICK] _ LXD115

30w LED Linear Downlight

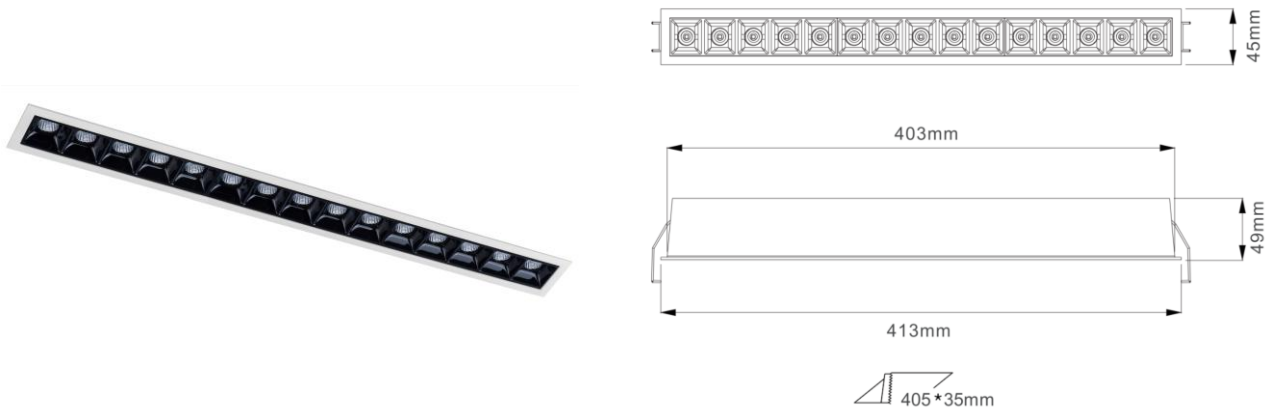

General Information

Housing Material:	Aluminium	Diffuser Material:	N/A
Colour (RAL):	White(9016) - Black(9004)	Weight:	560g (Lamp)
Dimensions (L-W-H):	413*45*49mm	Cuthole :	405*35mm
Connection:	AC Connector	Installation:	Recessed Mounted
Rotation Angle:	N/A	Tilting Angle:	N/A
Temperature:	-20 ~ +35°C	Accessories:	N/A

Photometrical Data

LED Manufacturer:	Luminus	LED Type:	SST-12
CCT:	2700K - 3000K - 4000K	CRI(Minimum):	95
lm system (±5%):	2166lm - 2348lm - 2670lm	lm source:	2588lm - 2776lm - 3165lm
Luminous Efficiency:	65lm/w - 70lm/w - 79lm/w	MacAdam:	3
Optic:	Reflector + Anti-glare Cover	Beam Angle:	15°/30°/45°
UGR:	<16	LifeSpan (Ta25°C):	>50.000h - L70B50

Electrical Data

Driver:	TRIDONIC	Input Voltage:	220-240VAC 50/60Hz
Output Voltage:	25-45VDC	Output Current:	700mA
Displacement Factor:	>0.95	Current Ripple:	±5%
W system:	33.5W	Ballast Losses:	3.9W
Control:	ON/OFF	Minimum Dimming:	N/A
Inrush Current:	25A / 200µs	Max No. of Units per MCB:	B10/13/16 = 14/19/24 C10/13/16 = 24/32/40