


LLR15-CCT

12w LED Module With CCT Switchable

Rio
LIGHT DYNAMIC



CCT Switchable

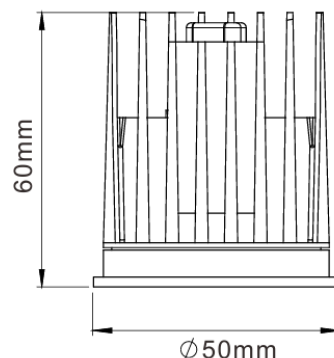

General Information

Housing Material:	Aluminium	Diffuser Material:	Frosted Glass
Colour (RAL):	Grey + Silver	Weight:	110g(Lamp)
Dimensions (L-W-H):	Dia.50mm – H60mm	Cuthole :	N/A
Connection:	AC Connector	Installation:	N/A
Rotation Angle:	N/A	Tilting Angle:	N/A
Temperature:	-20 ~ +35°C	Accessories:	N/A

Photometrical Data

LED Manufacturer:	TYF	LED Type:	TBG-1510
CCT:	2700K - 3000K(Mix) - 4000K	CRI(Minimum):	90
lm system (±5%):	1064lm - 1151lm - 1149lm	lm source:	1266lm - 1370lm - 1367lm
Luminous Efficiency:	72lm/w - 80lm/w - 78lm/w	MacAdam:	3
Optic:	Reflector	Beam Angle:	24°/45°/60°
UGR:	<19	LifeSpan (Ta25°C):	>50.000h - L70B50

Electrical Data

Driver:	LIFUD	Input Voltage:	220-240VAC 50/60Hz
Output Voltage:	25-42VDC	Output Current:	350mA
Power Factor:	>0.5	Current Ripple:	±5%
W system:	14.8W	Ballast Losses:	2.2W
Control:	ON/OFF	Minimum Dimming:	N/A
Inrush Current:	9A / 120µs	Max No. of Units	B10/13/16 = 30/-/50
		per MCB:	C10/13/16 = 60/-/90