



[LATTICE] _ L4TLT01

17w LED Square Tracklight

RiO
LIGHT DYNAMIC

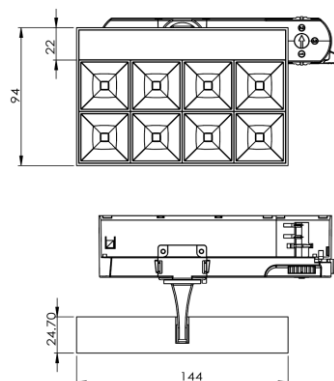

General Information

Housing Material:	Aluminium	Diffuser Material:	N/A
Colour (RAL):	White(9016) - Black(9004)	Weight:	500g
Dimensions (L-W-H):	L 144*W94*H24.7mm	Cuthole :	N/A
Connection:	Track Adapter (3phase)	Installation:	Track mounted
Rotation Angle:	350°	Tilting Angle:	90°
Temperature:	-20 ~ +35°C	Accessories:	N/A

Photometrical Data

LED Manufacturer:	TYF	LED Type:	EMC5050
CCT:	2700K - 3000K - 4000K	CRI (Minimum):	90
lm system (±5%):	2312lm - 2397lm - 2552lm	lm source:	2723lm - 2820lm - 3002lm
Luminous Efficiency:	119lm/w - 123lm/w - 131lm/w	MacAdam:	5
Opitc:	Reflector		15° / 24° / 35° / 55° / 75°
UGR:	<24	Beam Angle:	35°*35° / 55°*55° / 75°*75°
		LifeSpan (Ta25°C):	>50.000h - L70B50

Electrical Data

Driver:	KGP	Input Voltage:	220-240VAC 50/60Hz
Output Voltage:	20-42VDC	Output Current:	500mA
Power Factor:	>0.9	Current Ripple:	±5%
W system:	19.4W	Ballast Losses:	2W
Control:	ON/OFF	Minimum Dimming:	N/A
Inrush Current:	20A / 40µs	Max No. of Units	B10/13/16 = 30/39/48
		per MCB:	C10/13/16 =48/62/77