


[PETITE] _ LDG817

18w 2 Head LED Adjustable Downlight with LLR15 Module

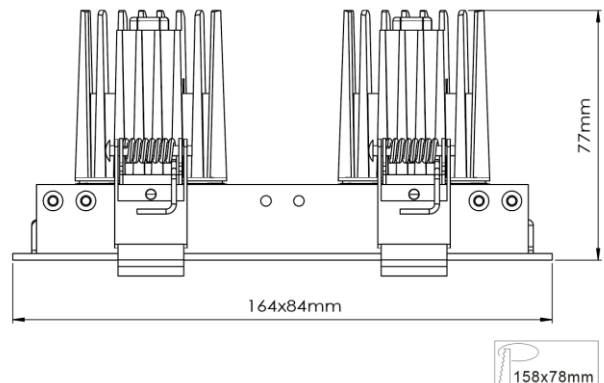

General Information

Housing Material:	Aluminium	Diffuser Material:	N/A
Colour (RAL):	White(9016) - Black(9004)	Weight:	440g
Dimensions (L-W-H):	164*84*62mm	Cut hole :	158*78mm
Connection:	AC Connector	Installation:	Recessed Mounted
Rotation Angle:	360°	Tilting Angle:	30°
Temperature:	-20 ~ +35°C	Accessories:	N/A

Photometrical Data

LED Manufacturer:	LUMINUS	LED Type:	CXM-6
CCT:	2700K - 3000K - 4000K	CRI(Minimum):	90
lm system (±5%):	905lm*2 - 939lm*2 - 992lm*2	lm source:	1065lm*2 - 1092lm*2 - 1139lm*2
Luminous Efficiency:	87lm/w - 90lm/w - 95lm/w	MacAdam:	3
Optic:	Reflector	Beam Angle:	22°/43°/55°
UGR:	<19	LifeSpan (Ta25°C):	>50.000h - L70B50

Electrical Data

Driver:	TRIDONIC	Input Voltage:	220-240VAC 50/60Hz
Output Voltage:	23-40VDC	Output Current:	250mA
Power Factor:	>0.5	Current Ripple:	±5%
W system:	10.5W*2	Ballast Losses:	2.1W*2
Control:	ON/OFF	Minimum Dimming:	N/A
Inrush Current:	10A / 115µs	Max No. of Units	B10/13/16 = 55/69/83
		per MCB:	C10/13/16 = 92/115/138