



[SCOPE] _ L4T252-CCT

12w LED Tracklight With Deep Anti-glare (3-CCT)

Rio
LIGHT DYNAMIC

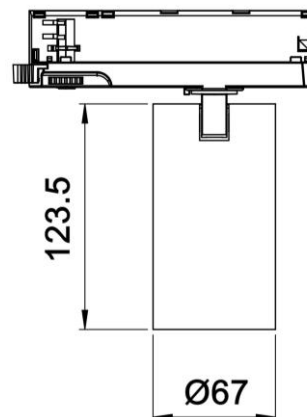

General Information

Housing Material:	Aluminium	Diffuser Material:	PC
Colour (RAL):	White(9016) - Black(9004)	Weight:	420g
Dimensions (L-W-H):	Dia.67 * H123.5mm	Cuthole :	N/A
Connection:	Track Adapter (3phase)	Installation:	Track mounted
Rotation Angle:	350°	Tilting Angle:	90°
Temperature:	-20 ~ +35°C	Accessories:	Honeycomb

Photometrical Data

LED Manufacturer:	TYF	LED Type:	TBG
CCT:	2700K - 3000K(Mix) - 4000K	CRI (Minimum):	90
lm system (±5%):	1084lm - 1194lm - 1129lm	lm source:	1480lm - 1632lm - 1542lm
Luminous Efficiency:	79lm/w - 86lm/w - 82lm/w	MacAdam:	3
Optic:	Lens	Beam Angle:	20° / 26° / 36° / 46°
UGR:	<10	LifeSpan (Ta25°C):	>50.000h - L70B50

Electrical Data


Driver:	TCI	Input Voltage:	220-240VAC 50/60Hz
Output Voltage:	5-42VDC	Output Current:	350mA
Power Factor:	>0.9	Current Ripple:	±5%
W system:	13.8W	Ballast Losses:	1.5W
Control:	ON/OFF	Minimum Dimming:	N/A
Inrush Current:	7A / 13µs	Max No. of Units	B10/13/16 = 31/39/50
		per MCB:	C10/13/16 = 52/65/85

[SCOPE] _ L4T252-CCT

12w LED Tracklight With Deep Anti-glare (3-CCT)



Accessories

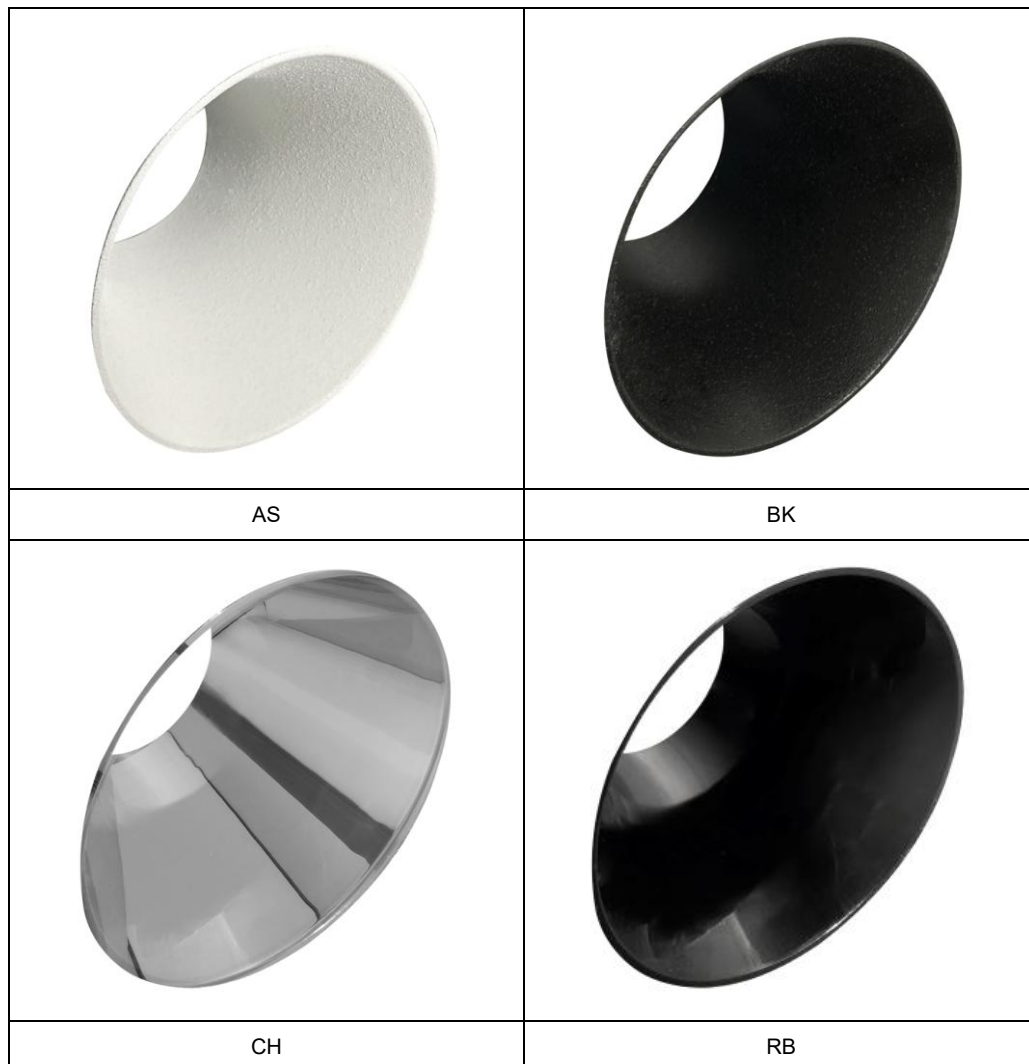

Note: The color of the Anti-Dazzle Cover will change the luminous flux, please refer to the test report and ies file.