


LDL265

12w LED Downlight

Rio
LIGHT DYNAMIC

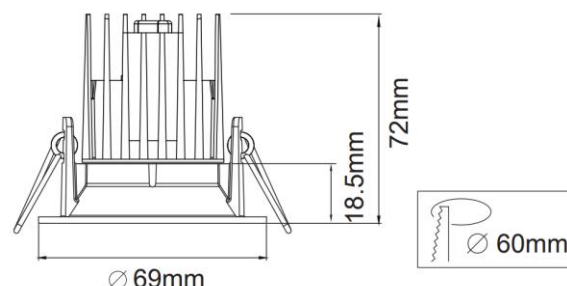

General Information

Housing Material:	Aluminium	Diffuser Material:	Glass
Colour (RAL):	White(9016) - Black(9004)	Weight:	128g (lamp)
Dimensions (L-W-H):	Dia.69mm - H72mm	Cut hole :	60mm
Connection:	AC Connector	Installation:	Recessed Mounted
Rotation Angle:	N/A	Tilting Angle:	N/A
Temperature:	-20 ~ +35°C	Accessories:	N/A

Photometrical Data

LED Manufacturer:	Luminus	LED Type:	CXM-9
CCT:	2700K - 3000K - 4000K	CRI(Minimum):	90
lm system (±5%):	1298lm - 1349lm - 1413lm	lm source:	1583lm - 1644lm - 1719m
Luminous Efficiency:	90lm/w - 93lm/w – 98lm/w	MacAdam:	3
Optic:	Reflector	Beam Angle:	24°/45°/60°
UGR:	<19	LifeSpan (Ta25°C):	>50.000h - L70B50

Electrical Data

Driver:	Eaglerise	Input Voltage:	220-240VAC 50/60Hz
Output Voltage:	30-40VDC	Output Current:	350mA
Displacement Factor:	≥0.7	SVM & Pst:	≤0.4 & ≤1
W system:	14.5W	Ballast Losses:	2.1W
Control:	ON/OFF	Minimum Dimming:	N/A
Inrush Current:	8.44A / 80μs	Max No. of Units	B10/13/16 = 26/-/42
		per MCB:	C10/13/16 = 26/-/42