



[LATTICE] _ L4TLT13

31w LED Wallwisher Tracklight

Rio
LIGHT DYNAMIC

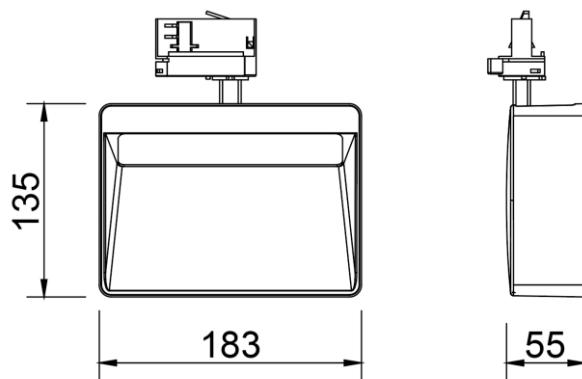

General Information

Housing Material:	Aluminium
Colour (RAL):	White(9016) - Black(9004)
Dimensions (L-W-H):	L183*W135*H55mm
Connection:	Track Adapter (3phase)
Rotation Angle:	350°
Temperature:	-20 ~ +35°C

Diffuser Material:	PC
Weight:	847g
Cuthole :	N/A
Installation:	Track mounted
Tilting Angle:	90°
Accessories:	N/A

Photometrical Data

LED Manufacturer:	Luminus
CCT:	2700K - 3000K - 4000K
lm system (±5%):	2531lm - 2599lm - 2770lm
Luminous Efficiency:	73lm/w – 76lm/w - 81lm/w
Optic:	Lens
UGR:	<19

LED Type:	CXM-4 *5pcs
CRI (Minimum):	90
lm source:	3300lm - 3410lm - 3590lm
MacAdam:	3
Beam Angle:	Wall Washer
LifeSpan (Ta25°C):	>50.000h - L70B50

Electrical Data

Driver:	AcTEC
Output Voltage:	14-42VDC
Power Factor:	>0.95
W system:	34.2W
Control:	ON/OFF
Inrush Current:	30A / 200µs

Input Voltage:	220-240VAC 50/60Hz
Output Current:	900mA
Current Ripple:	±5%
Ballast Losses:	4.4W
Minimum Dimming:	N/A
Max No. of Units	B10/13/16 = 8/11/13
per MCB:	C10/13/16 = 18/23/29