

PRODUCT DATASHEET

Model: LSC204

Category: LED Surface Mount Downlight

Description: 41w LED Surface Mount Downlight



General Information

Material: Aluminium

Fitting Colors: White/ Black/ Painted Silver

Rotation Angle (degree): Not Applicable

Tilting Angle (degree): Not Applicable

Track System: Not Applicable

IP Rating: Not Applicable

Working Temperature (°C): -5- +35

Storage Temperature (°C): -20 - +50



Product Dimensions and Cut-out Information


Fitting Length (mm): Not Applicable

Diameter (mm): 120

Height (mm): 210

Cut-out Dimension (mm): Not Applicable

Dimension:

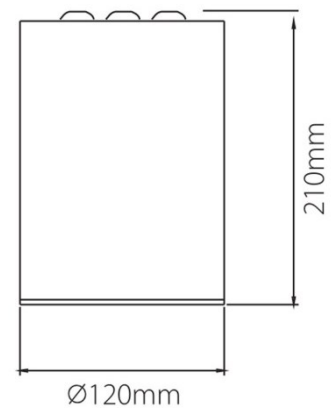

Packing Information

Packaging Type: Individual box

Quantity per carton: 8

CBM per carton: 0.0478

Gross weight per carton (kgs): 15

Lifespan

Lifetime (hours): 30000

Luminous Flux after 50000hours (lm): LM80 Comply

PRODUCT DATASHEET

Model: LSC204

Category: LED Surface Mount Downlight

Description: 41w LED Surface Mount Downlight



Light Technical Information

Color Temperature	CRI (Ra)	Gamut Index (GAI)	System Lumen	Lumen per Watt
2700	90	90	3969	84
2700	95	100	3797	81
3000	90	90	4283	91
3000	95	100	3996	85
3000 Vivid White	90	110	4068	87
4000	95	100	3957	84
5000	80	90	Not Applicable	Not Applicable
5000	90	90	4632	99

LED Manufacturer: Luminus

LED Type: COB

LED Model: CXM-14 Gen 3

Optic : Reflector

Beam Angle (°) : 17/28/40/55

Electrical Information

System Power (w): 47

Input Voltage (v) & Frequency: 220-240V 50/60Hz

Output Voltage (v): 31-37

Current (mA): 1200

Non-Dimmable: RiO Non-dimmable Driver

Power Factor: 0.9

Efficiency (%): 88

Total Harmonic Distortion (%): <50

Ripple (%): ±5

Dimmable: Triac Dimming – Upon Request

1-10V Dimming – Upon Request

Dali Dimming – Upon Request