

PRODUCT DATASHEET

Model: L2T722 L4T722

Category: LED Tracklight

Description: 26W LED Tracklight with Integrated Driver & Track Adaptor



General Information

Material: Aluminum

Fitting Colors: Matt White/ Black

Rotation Angle (degree): 350

Tilting Angle (degree): 90

Track System: Available in single wire, 3 phase

IP Rating: 20

Working Temperature (°C): -5- +35

Storage Temperature (°C): -20 - +50



Product Dimensions and Cut-out Information


Fitting Length (mm): 125

Diameter (mm): 100

Height (mm): Not Applicable

Cut-out Dimension (mm): Not Applicable

Dimension:

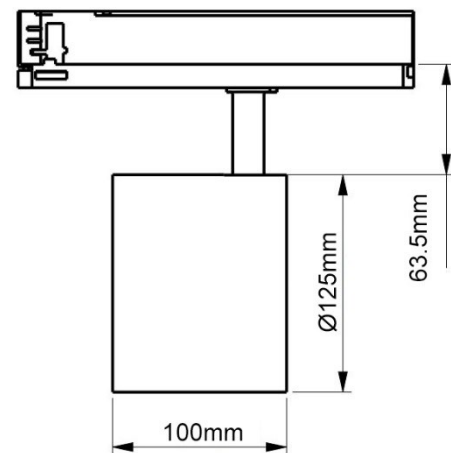

Lifespan

Lifetime (hours): 50000

Luminous Flux after 50000hours (lm): LM80 Comply

PRODUCT DATASHEET

Model: L2T722 L4T722

Category: LED Tracklight

Description: 26W LED Tracklight with Integrated Driver & Track Adaptor



Light Technical Information

Color Temperature	CRI (Ra)	System Lumen	Lumen per Watt
3000	90	2949	98

LED Manufacturer: Tridonic

LED Type: COB

LED Model: SLE G5 XD ADV

Optic: Lens

Beam Angle (°): 9

Electrical Information

System Power (w): 30

Input Voltage (v) & Frequency: 220-240V 50/60Hz

Output Voltage (v): 34-41.5

Current (mA): 700

Non-Dimmable: TCI GA-016

Power Factor: 0.97

Efficiency (%): >86

Total Harmonic Distortion (%): Not Applicable

Ripple (%): 3

Dimmable: Triac Dimming – Upon Request

1-10V Dimming – Upon Request

Dali Dimming – Upon Request