



[LATTICE] _ L4TLT03

17w LED Wallwasher Tracklight

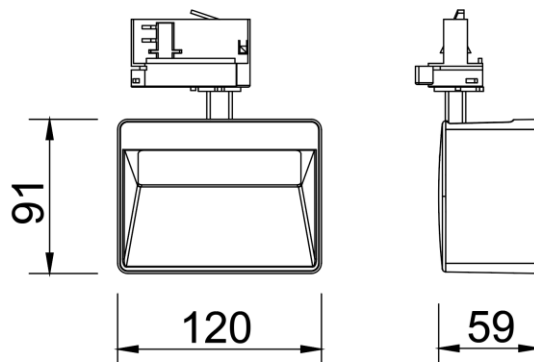

General Information

Housing Material:	Aluminium	Diffuser Material:	PC
Colour (RAL):	White(9016) - Black(9004)	Weight:	576g
Dimensions (L-W-H):	L 120*W91*H59mm	Cuthole :	N/A
Connection:	Track Adapter (3phase)	Installation:	Track mounted
Rotation Angle:	350°	Tilting Angle:	90°
Temperature:	-20 ~ +35°C	Accessories:	N/A

Photometrical Data

LED Manufacturer:	Luminus	LED Type:	CXM-4 *3pcs
CCT:	2700K - 3000K - 4000K	CRI (Minimum):	90
lm system (±5%):	1405lm - 1486lm - 1597lm	lm source:	1845lm - 1905lm - 2007lm
Luminous Efficiency:	69lm/w - 73lm/w - 78lm/w	MacAdam:	3
Optic:	Lens	Beam Angle:	Wall Washer
UGR:	<19	LifeSpan (Ta25°C):	>50.000h - L70B50

Electrical Data

Driver:	AcTEC	Input Voltage:	220-240VAC 50/60Hz
Output Voltage:	14-42VDC	Output Current:	500mA
Power Factor:	>0.9	Current Ripple:	±5%
W system:	20.5W	Ballast Losses:	3.0W
Control:	ON/OFF	Minimum Dimming:	N/A
Inrush Current:	15A / 100µs	Max No. of Units per MCB:	B10/13/16 = 46/60/74 C10/13/16 = 71/92/114