

PRODUCT DATASHEET

Model: LDG806

Category: LED Downlight

Description: 7w LED Grill light



General Information

Material: Aluminum

Fitting Colors: Matte White / Black

Rotation Angle (degree): 355

Tilting Angle (degree): 30

Track System: Not Applicable

IP Rating: 20

Working Temperature (°C): -5 - +35

Storage Temperature (°C): -20 - +50



Product Dimensions and Cut-out Information


Fitting Length (mm): Not Applicable

Diameter (mm): 84 x 84

Height (mm): 70

Cut-out Dimension (mm): 78 x 78

Dimension:

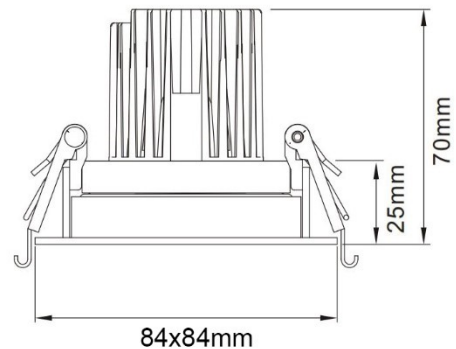

Packing Information

Packaging Type: Individual box

Quantity per carton: 30

CBM per carton: 0.04

Gross weight per carton (kgs): 0.28

Lifespan

Lifetime (hours): 50000

Luminous Flux after 50000hours (lm): LM80 Comply

PRODUCT DATASHEET

Model: LDG806

Category: LED Downlight

Description: 7w LED Grill light



Light Technical Information

Color Temperature	CRI (Ra)	Gamut Index (GAI)	System Lumen	Lumen per Watt
2700	90	90	655	73
2700	95	100	613	68
3000	90	90	709	79
3000	95	100	645	72
3000 Vivid White	90	110	676	75
4000	90	90	762	85
4000	95	100	666	74
5000	80	90	872	97
5000	90	90	740	82

LED Manufacturer: Luminus

LED Type: COB

LED Model: CXM-6 G4

Optic: Reflector

Beam Angle (°): 17/24/36

Electrical Information

System Power (w): 9

Input Voltage (v) & Frequency: 220-240V 50/60Hz

Output Voltage (v): 31-37

Current (mA): 350

Non-dimmable: HEP G5S10W200LR-Z

Power Factor: 0.9

Efficiency (%): 80

Total Harmonic Distortion (%): 15

Ripple (%): 10

Dimmable: Triac Dimming – Upon Request

1-10V Dimming – Upon Request

Dali Dimming – Upon Request

Published on 27.05.2021

©2020 RiO Industrial Limited

All rights reserved