

PRODUCT DATASHEET

Model: LXW102

Category: LED Recessed Linear Wall washer

Description: 36w LED Recessed Linear Wall washer with Triac dimming



General Information

Material: Aluminum + Iron

Fitting Colors: Matte White/ Black

Rotation Angle (degree): Not Applicable

Tilting Angle (degree): Not Applicable

Track System: Not Applicable

Working Temperature (°C): -20 - +32

Storage Temperature (°C): -20 - +50



Product Dimensions and Cut-out Information



Fitting Length (mm): 51

Diameter (mm): 286 x 49

Height (mm): Not Applicable

Cut-out Dimension (mm): 275 x 36

Dimension:

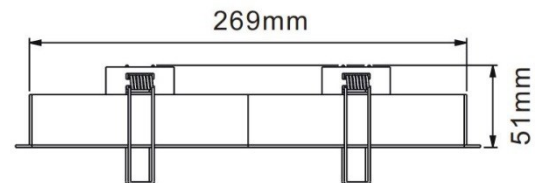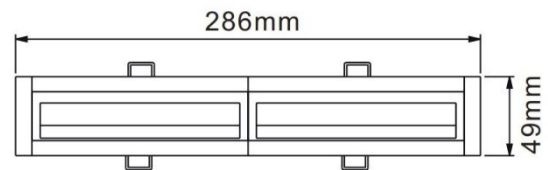

Packing Information

Packaging Type: Individual box

Quantity per carton: 10

CBM per carton: 0.04

Gross weight per carton (kgs): Not Applicable

Lifespan

Lifetime (hours): 50000

Luminous Flux after 50000hours (lm): LM80 Comply

PRODUCT DATASHEET

Model: LXW102

Category: LED Recessed Linear Wall washer

Description: 36w LED Recessed Linear Wall washer with Triac dimming



Light Technical Information

Color Temperature	CRI (Ra)	Gamut Index (GAI)	System Lumen	Lumen per Watt
2700	90	90	2086	50
2700	95	100	1930	46
3000	90	90	2183	52
3000	95	100	2027	48
4000	80	90	2320	55
4000	90	100	2144	51
5000	80	90	2729	65
5000	90	100	2729	65

LED Manufacturer: Luminus

LED Type: SMD

LED Model: 3030 6V

Optic: Reflector + Lens + Diffuser

Beam Angle (°): 66

Electrical Information

System Power (w): 42

Input Voltage (v) & Frequency: 220-240V 50/60Hz

Output Voltage (v): 34.4 – 37.6

Current (mA): 500

Triac Dimming: HEP G5RT20W500LRP

Power Factor: 0.9

Efficiency (%): 86

Total Harmonic Distortion (%): 20

Ripple (%): 10

Dimmable: 1-10V Dimming – Upon Request

Dali Dimming – Upon Request

PRODUCT DATASHEET

Model: LXW102

Category: LED Recessed Linear Wall washer

Description: 36w LED Recessed Linear Wall washer with Triac dimming



Triac Dimmer

Manufacturer	Model
CLIPSAL	32E450UDM
CLIPSAL	32E450TM
TELLER	40200LED
PDL	654M
T&J	W2747
HYTEC	HY-L400DIM-T