

PRODUCT DATASHEET

Model: L2T724 L3T724 L4T724

Category: LED Tracklight

Description: 27W LED Tracklight



General Information

Material: Aluminum

Fitting Colors: Matte White/ Black

Rotation Angle (degree): 350

Tilting Angle (degree): 90

Track System: Available in single wire, 3 wire, 3 phase

IP Rating: 20

Working Temperature (°C): -5- +35

Storage Temperature (°C): -20 - +50



Product Dimensions and Cut-out Information

Fitting Length (mm): 187

Diameter (mm): 85

Height (mm): 166

Cut-out Dimension (mm): Not Applicable

Packing Information

Packaging Type: Individual box

Quantity per carton: 12

CBM per carton: 0.040


Gross weight per carton (kgs): 9.6

Lifespan

Lifetime (hours): 50000

Luminous Flux after 50000hours (lm): LM80 Comply

Dimension:

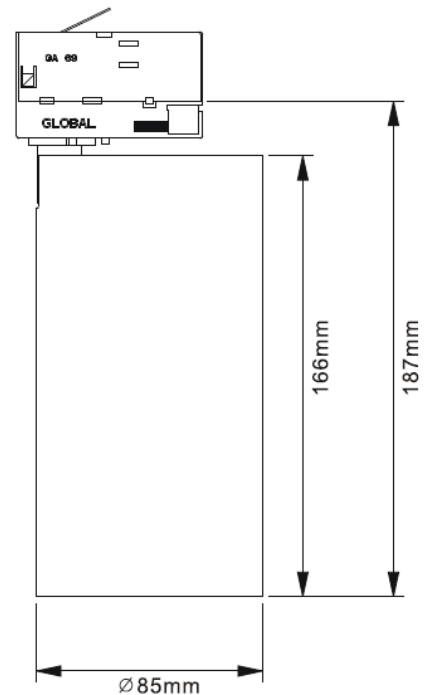

PRODUCT DATASHEET

Model: L2T724 L3T724 L4T724

Category: LED Tracklight

Description: 27W LED Tracklight



Light Technical Information

Color Temperature	CRI (Ra)	System Lumen	Lumen per Watt
2700	90	2525	77
2700	95	2183	66
3000	90	2636	80
3000	95	2270	69
4000	90	2903	88
4000	95	2632	80
5000	90	3037	72
5000	95	2623	79

LED Manufacturer: Luminus

LED Type: COB

LED Model: CXM-14 Gen 4

Optic: Reflector

Beam Angle (°): 17/ 24/ 36

Electrical Information

System Power (w): 30

Input Voltage (v) & Frequency: 220-240V 50/60Hz

Output Voltage (v): 31-37

Current (mA): 800

Driver: Rio Non-Dimmable driver

Power Factor: 0.90

Efficiency (%): 90

Total Harmonic Distortion (%): <15

Ripple (%): ±1

Dimmable: Triac Dimming – Upon Request

1-10V Dimming – Upon Request

Dali Dimming – Upon Request