

PRODUCT DATASHEET

Model: L4TS640

Category: LED Pendant Light

Description: 13w LED Pendant Light



General Information

Material: Aluminum

Fitting Colors: White/ Black

Rotation Angle (degree): Not Applicable

Tilting Angle (degree): Not Applicable

Track System: Available in single wire, 3 wire, 3 phase

IP Rating: 20

Working Temperature (°C): -5 - +35

Storage Temperature (°C): -20 - +50



Product Dimensions and Cut-out Information


Fitting Length (mm): 300

Diameter (mm): 40

Height (mm): Not Applicable

Cut-out Dimension (mm): Not Applicable

Dimension:

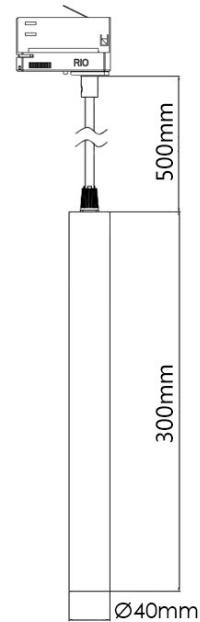

Packing Information

Packaging Type: Individual box

Quantity per carton: 20

Lifespan

Lifetime (hours): 50000

Luminous Flux after 30000hours (lm): LM80 Comply

PRODUCT DATASHEET

Model: L4TS640

Category: LED Pendant Light

Description: 13w LED Pendant Light



Light Technical Information

Color Temperature	CRI (Ra)	Gamut Index (GAI)	System Lumen	Lumen per Watt
2700	90	90	1040	74
2700	95	100	994	71
3000	90	90	1120	80
3000	95	100	1048	75
4000	90	90	1066	76
4000	95	100	1120	80
5000	80	90	1402	100
5000	90	90	1213	87

LED Manufacturer: Luminus

LED Type: COB

LED Model: CXM-4 Gen 6

Optic: Reflector

Beam Angle (°): 17/24/36

Electrical Information

System Power (w): 14

Input Voltage (v) & Frequency: 48V 50/60Hz

Output Voltage (v): 31-37

Current (mA): 350

Non-Dimmable: HEP G5DC30W700CA

Efficiency (%): >92

Ripple (%): ±5

Dimmable: Triac Dimming – Upon Request

1-10V Dimming – Upon Request

Dali Dimming – Upon Request