

# PRODUCT DATASHEET

## Model: L4T731

Category: LED Tracklight

Description: 13w LED Tracklight



## General Information

Material: Aluminum

Fitting Colors: White/ Black/ Painted Silver

Rotation Angle (degree): 350

Tilting Angle (degree): 90

Track System: Available in single wire, 3 wire, 3 phase

IP Rating: 20

Working Temperature (°C): -20 - +32

Storage Temperature (°C): -20 - +50

Approval: /



## Product Dimensions and Cut-out Information


Fitting Length (mm): 120

Diameter (mm): 52

Height (mm): Not Applicable

Cut-out Dimension (mm): Not Applicable

Dimension:

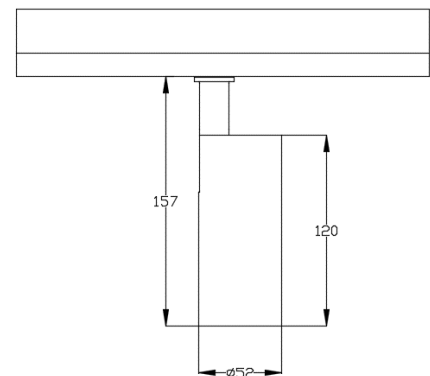

## Packing Information

Packaging Type: Individual box

Quantity per carton: 20

CBM per carton: 0.0621

## Lifespan

Lifetime (hours): 50000

Luminous Flux after 50000hours (lm): LM80 Comply

# PRODUCT DATASHEET

## Model: L4T731

Category: LED Tracklight

Description: 13w LED Tracklight



## Light Technical Information

Color Temperature	CRI (Ra)	System Lumen	Lumen per Watt
2700	90	884	59
2700	95	772	51
3000	90	933	62
3000	95	828	55
3500	90	976	65
3500	95	870	58
4000	90	990	66
4000	95	898	60
5000	90	996	66
5000	95	870	58

LED Manufacturer: Luminus

LED Type: COB

LED Model: CXM-6-30-90-36-TC40

Optic: Reflector

Beam Angle (°): 17/24/36

## Electrical Information

System Power (w): 15

Input Voltage (v) & Frequency: 220-240V 50/60Hz

Output Voltage (v): 31-37

Current (mA): 350

Non-Dimming: GLOBAL GA-021

Power Factor: 0.95

Efficiency (%): 84

Total Harmonic Distortion (%): <9

Ripple (%): ±5

Dimmable: Triac Dimming – Upon Request

1-10V Dimming – Upon Request

DALI Dimming – Upon Request